


## FR100 – Curve, powered 90° Type DKA

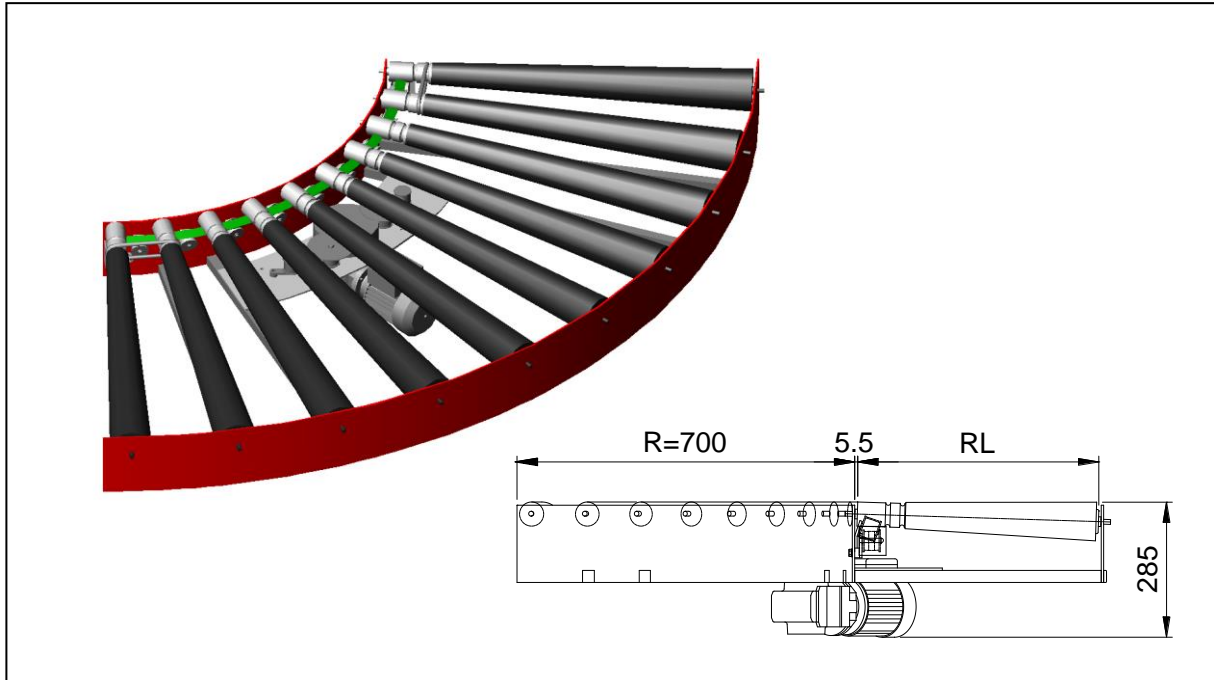

### Area of usage:

For the change of the conveying direction with 90°. The goods keep its orientation in relation to the roller conveyor.

### Technical data:

Powered roller conveyor curve with conical rolls.	
Frame:	Flat steel bar and square tube.
Roller length:	400, 500, 600, 700, 800 and 900 mm.
Roller pitch:	10 roller, inner radius 115 mm. 16 roller, inner radius 69 mm.
Roller type:	Ø50x1.5 mm, ball bearing with stainless shaft and conical segments in injection-moulded plastic.
Drive unit:	Worm gear motor.
Motor effect:	0.25 kW.
Voltage:	230/400 V <sub>AC</sub> , 50 Hz.
Sealing class:	IP55.
Transport speed:	9, 12, 15, 20 and 30 m/min.
Support:	AX100 type BS.

### Surface treatment:

RAL3020 (red) or zinc plated.

### Other:

Delivered with joint bracket for connecting conveyor.  
Other roller lengths, roller types, materials, transport speeds and colours on request.