


AX100 – Gate, powered/unpowered Type DG/OG

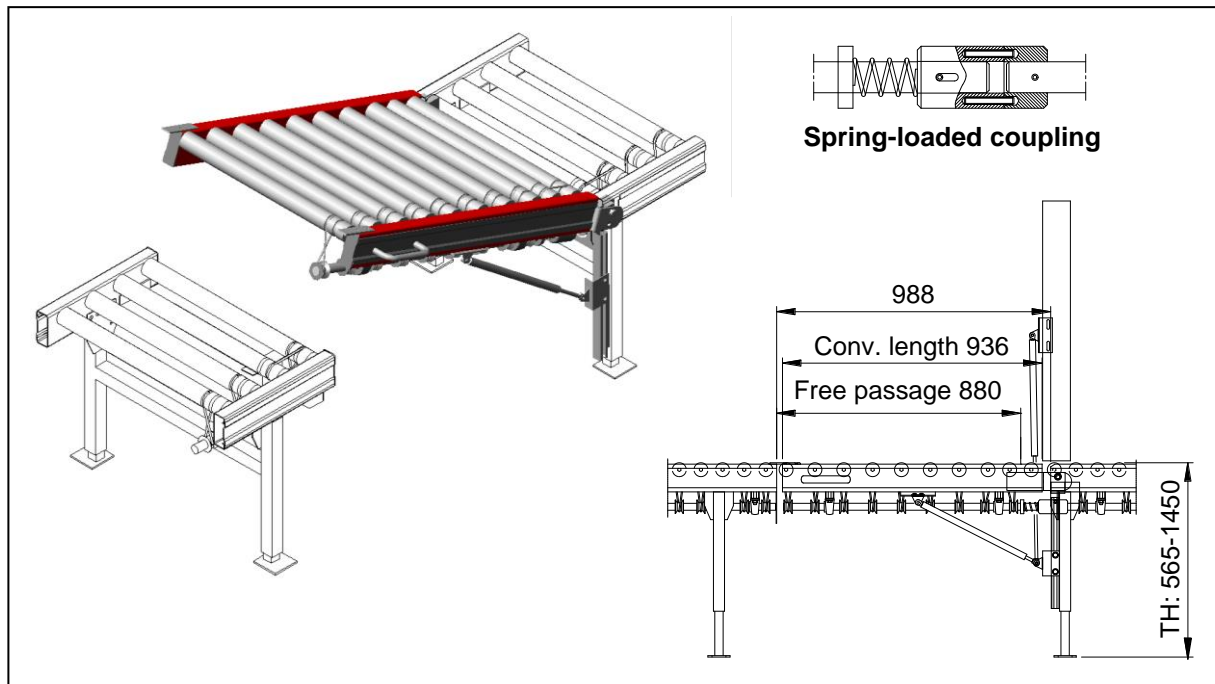

Area of usage:

For free passage through roller conveyor.

Technical data:

Powered accumulating or unpowered roller conveyor.
Frame: C-profile 15x40x100x40x15x2 mm and square tube.
Roller length: 300, 400, 500, 600, 700, 800 and 900 mm.
Roller pitch: 52 and 104 mm.
Roller type: Ø50x1.5 mm, with ball bearings.
Lifting help: Gas spring.
Powered design: Through spring-loaded coupling from the connecting conveyor.
Speed: See drive unit AX100 type DR. Max speed 20 m/min.
Support: Supplies with attachment for gas spring.

Surface treatment:

Frame: RAL3020 (red) or zinc plated.
Other parts: Zinc plated.

Other:

To make sure that the goods will not fall on the floor when the gate is open, it should be placed so that it works as a stop in its upright position.
At an additional cost, the roller conveyor can be equipped with pulleys for fixed powering.
Black plastic covers for the frame is included.
Double gate, other conveyor length, roller length, roller types, material and colours on request.

AX100 – Gate, powered Type DG

Article number:

Roller length	Roller pitch	
	52 mm	104 mm
300 mm	AXDG00300052	AXDG00300104
400 mm	AXDG00400052	AXDG00400104
500 mm	AXDG00500052	AXDG00500104
600 mm	AXDG00600052	AXDG00600104
700 mm	AXDG00700052	AXDG00700104
800 mm	AXDG00800052	AXDG00800104
900 mm	AXDG00900052	AXDG00900104

AX100 – Gate, unpowered Type OG

Article number:

Roller length	Roller pitch	
	52 mm	104 mm
300 mm	AXOG00300052	AXOG00300104
400 mm	AXOG00400052	AXOG00400104
500 mm	AXOG00500052	AXOG00500104
600 mm	AXOG00600052	AXOG00600104
700 mm	AXOG00700052	AXOG00700104
800 mm	AXOG00800052	AXOG00800104
900 mm	AXOG00900052	AXOG00900104

Ensure the article number is stated when ordering.