


## AX100 – Curve, powered 45° Type DKA

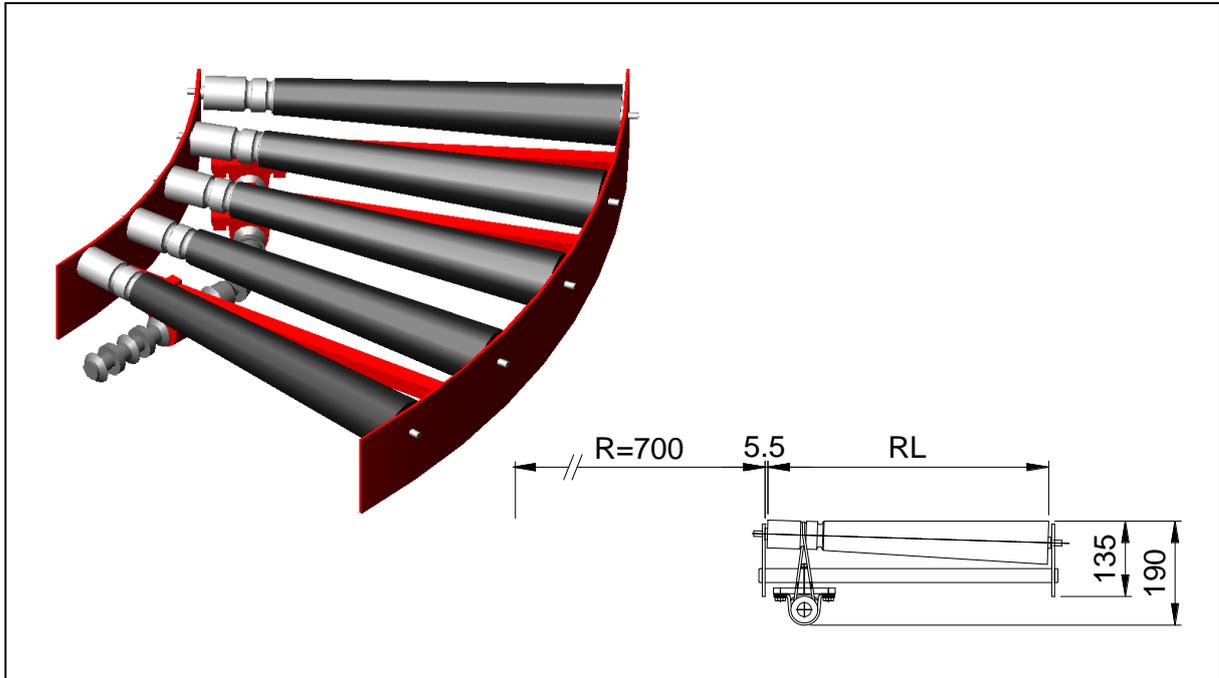

### Area of usage:

For change of the conveying direction with 45°. The goods keep its orientation in relation to the roller conveyor.

### Technical data:

Powered roller conveyor curve with conical rolls.

Frame:	Flat steel bar and square tube.
Roller length:	300, 400, 500, 600, 700, 800 and 900 mm.
Roller pitch:	5 roller, inner radius 122 mm. 9 roller, inner radius 61 mm.
Roller type:	Ø50x1.5 mm, ball bearing with stainless shaft and conical segments in injection-moulded plastic.
Drive unit:	Driven from connecting conveyor by shaft coupling.
Speed:	See drive unit AX100 type DR.
Support:	AX100 type BS.

### Surface treatment:

RAL3020 (red) or zinc plated.

### Other:

A curve with conical roller can not be used as a gravity curve. If gravity curve is needed use wheel curve AX100 type HJK or unpowered curve with divided rollers.  
Delivered with joint brackets for connecting conveyor.  
Other roller length, roller types, material and colours on request.

## AX100 – Curve, powered 45° Type DKA

**Article number:**

Roller length	5 rollers	9 rollers
300 mm	AXDKA4503001	AXDKA4503002
400 mm	AXDKA4504001	AXDKA4504002
500 mm	AXDKA4505001	AXDKA4505002
600 mm	AXDKA4506001	AXDKA4506002
700 mm	AXDKA4507001	AXDKA4507002
800 mm	AXDKA4508001	AXDKA4508002
900 mm	AXDKA4509001	AXDKA4509002

*Ensure the article number is stated when ordering.*