


AX100 – Transveyor belt, single Type VR

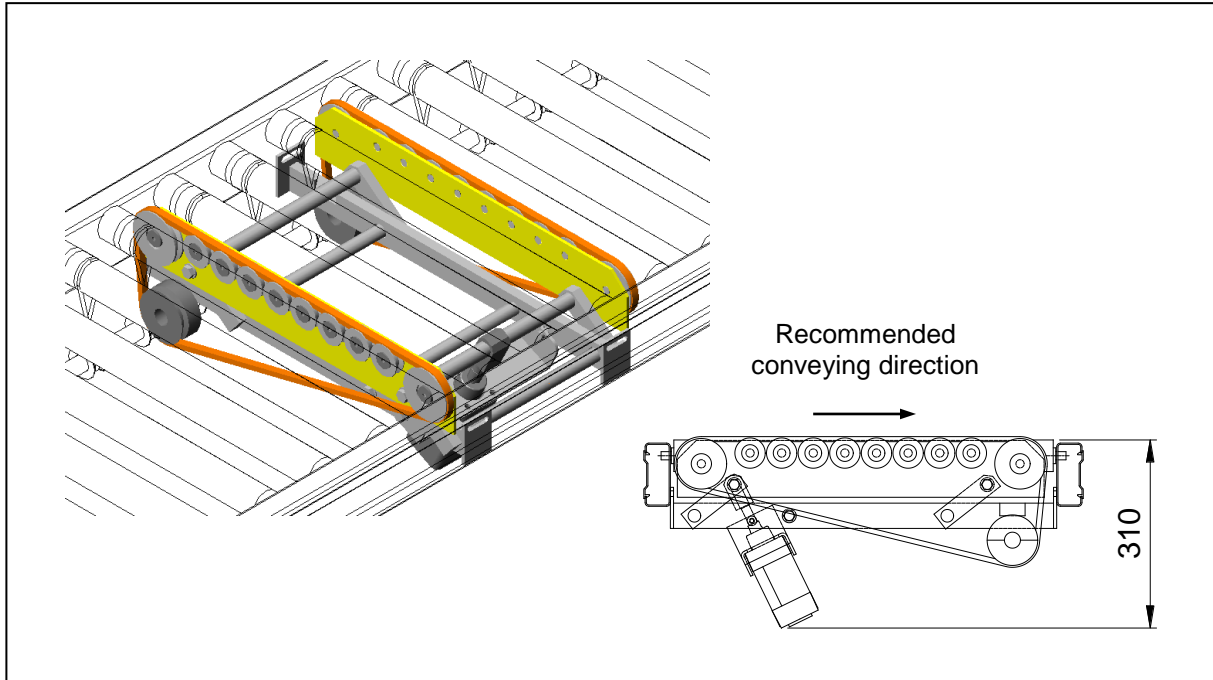

Area of usage:

90° transfer between main conveyor and side conveyors.

Technical data:

The transveyor is driven from the roller conveyors drive shaft. The movement takes place by using a polyurethane belt.

Air consumption: 0.65 NL/cycle.

Lifting capacity: 500 N in 2-belted design.
700 N with larger cylinder.

Cylinder: VDMA-standard.

Speed: 2.1 x conveyors speed in standard design.

To be placed: Anywhere within the conveyor.

C/c-between belts: 130, 182, 234, 286, 338 and 390 mm.

Roller pitch over belts: Min 78 mm.

Surface treatment:

Movable parts: RAL1006 (yellow).

Other parts: Zinc plated.

Other:

Delivery without pneumatic valve.

The transveyors c/c should be about 2/3 of the goods length.

3 or more belt transveyor and separate drive for reversible operation on request.

AX100 – Transveyor belt, single Type VR

Article number:

C/C-width	Roller length			
	300 mm	400 mm	500 mm	600 mm
130 mm	AXVR03013021	AXVR04013021	AXVR05013021	AXVR06013021
182 mm	AXVR03018221	AXVR04018221	AXVR05018221	AXVR06018221
234 mm	AXVR03023421	AXVR04023421	AXVR05023421	AXVR06023421
286 mm	AXVR03028621	AXVR04028621	AXVR05028621	AXVR06028621
338 mm	AXVR03033821	AXVR04033821	AXVR05033821	AXVR06033821
390 mm	AXVR03039021	AXVR04039021	AXVR05039021	AXVR06039021

	700 mm	800 mm	900 mm
130 mm	AXVR07013021	AXVR08013021	AXVR09013021
182 mm	AXVR07018221	AXVR08018221	AXVR09018221
234 mm	AXVR07023421	AXVR08023421	AXVR09023421
286 mm	AXVR07028621	AXVR08028621	AXVR09028621
338 mm	AXVR07033821	AXVR08033821	AXVR09033821
390 mm	AXVR07039021	AXVR08039021	AXVR09039021

Ensure the article number is stated when ordering.