


AX100 – Transveyor belt, double Type VR

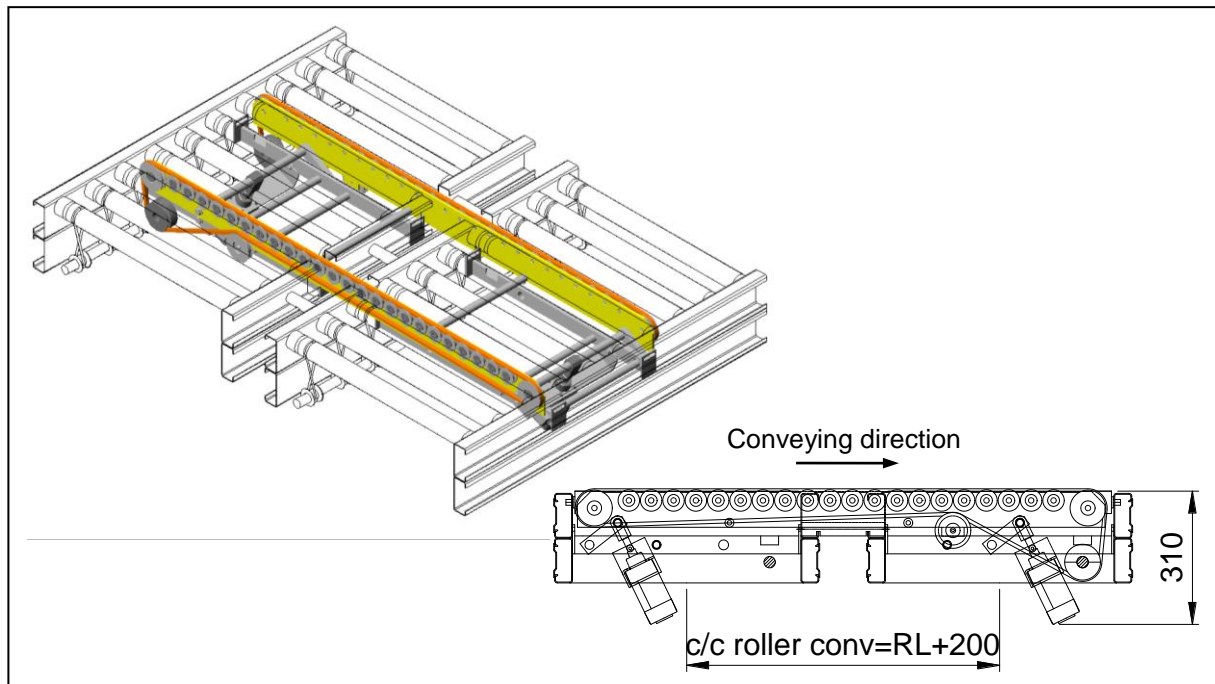

Area of usage:

For 90° transfer between 2 parallel roller conveyors.

Technical data:

The transveyor is driven from the roller conveyors drive shaft. The movement takes place by using a polyurethane belt.

Air consumption:	1.25 NL/cycle.
Lifting capacity:	700 N in 2-belted design.
Cylinder:	VDMA-standard.
Speed:	2.1 x conveyors speed in standard design.
To be placed:	Anywhere within the conveyor.
C/C-between belts:	130, 182, 234, 286, 338 and 390 mm.
Roller pitch over belts:	Min 78 mm.

Surface treatment:

Movable parts:	RAL1006 (yellow).
Other parts:	Zinc plated.

Other:

Delivery without pneumatic valve.

The transveyors c/c should be about 2/3 of the goods length.

3 or more belt transveyors and separate drive for reversible operation on request.

AX100 – Transveyor belt, double Type VR

Article number:

C/C-width	Roller length			
	300 mm	400 mm	500 mm	600 mm
130 mm	AXVR03013022	AXVR04013022	AXVR05013022	AXVR06013022
182 mm	AXVR03018222	AXVR04018222	AXVR05018222	AXVR06018222
234 mm	AXVR03023422	AXVR04023422	AXVR05023422	AXVR06023422
286 mm	AXVR03028622	AXVR04028622	AXVR05028622	AXVR06028622
338 mm	AXVR03033822	AXVR04033822	AXVR05033822	AXVR06033822
390 mm	AXVR03039022	AXVR04039022	AXVR05039022	AXVR06039022

	700 mm	800 mm	900 mm
130 mm	AXVR07013022	AXVR08013022	AXVR09013022
182 mm	AXVR07018222	AXVR08018222	AXVR09018222
234 mm	AXVR07023422	AXVR08023422	AXVR09023422
286 mm	AXVR07028622	AXVR08028622	AXVR09028622
338 mm	AXVR07033822	AXVR08033822	AXVR09033822
390 mm	AXVR07039022	AXVR08039022	AXVR09039022

Ensure the article number is stated when ordering.