


AX100 – Transveyor chain, single Type VK

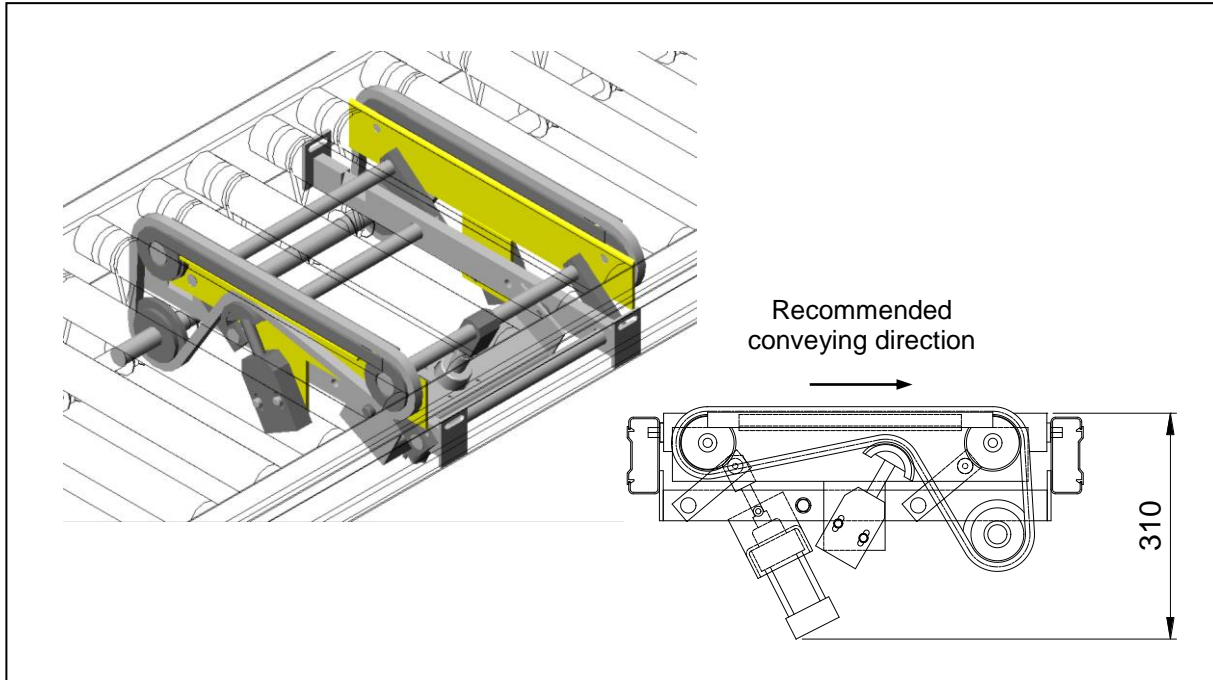

Area of usage:

90° transfer between main conveyor and side conveyors.

Technical data:

The transveyor is driven from the roller conveyors drive shaft. The movement takes place by using a chain.

Air consumption: 0.65 NL/cycle.
Lifting capacity: 500 N in 2-stringed design.
700 N with larger cylinder.

Cylinder: VDMA-standard.
Speed: 2.1 x conveyors speed in standard design.
To be placed: Anywhere within the conveyor.
C/c-between chains: 130, 182, 234, 286, 338 and 390 mm.
Roller pitch over chains: Min 104 mm.

Surface treatment:

Movable parts: RAL1006 (yellow).
Other parts: Zinc plated.

Other:

Delivery without pneumatic valve.
The transveyors c/c should be about 2/3 of the goods length.
3 or more chains transveyor and separate drive for reversible operation on request.

AX100 – Transveyor chain, single Type VK

Article number:

C/C-width	Roller length			
	300 mm	400 mm	500 mm	600 mm
130 mm	AXVK03013021	AXVK04013021	AXVK05013021	AXVK06013021
182 mm	AXVK03018221	AXVK04018221	AXVK05018221	AXVK06018221
234 mm	AXVK03023421	AXVK04023421	AXVK05023421	AXVK06023421
286 mm	AXVK03028621	AXVK04028621	AXVK05028621	AXVK06028621
338 mm	AXVK03033821	AXVK04033821	AXVK05033821	AXVK06033821
390 mm	AXVK03039021	AXVK04039021	AXVK05039021	AXVK06039021

	700 mm	800 mm	900 mm
130 mm	AXVK07013021	AXVK08013021	AXVK09013021
182 mm	AXVK07018221	AXVK08018221	AXVK09018221
234 mm	AXVK07023421	AXVK08023421	AXVK09023421
286 mm	AXVK07028621	AXVK08028621	AXVK09028621
338 mm	AXVK07033821	AXVK08033821	AXVK09033821
390 mm	AXVK07039021	AXVK08039021	AXVK09039021

Ensure the article number is stated when ordering.