


AX100 – Elevator Type GL

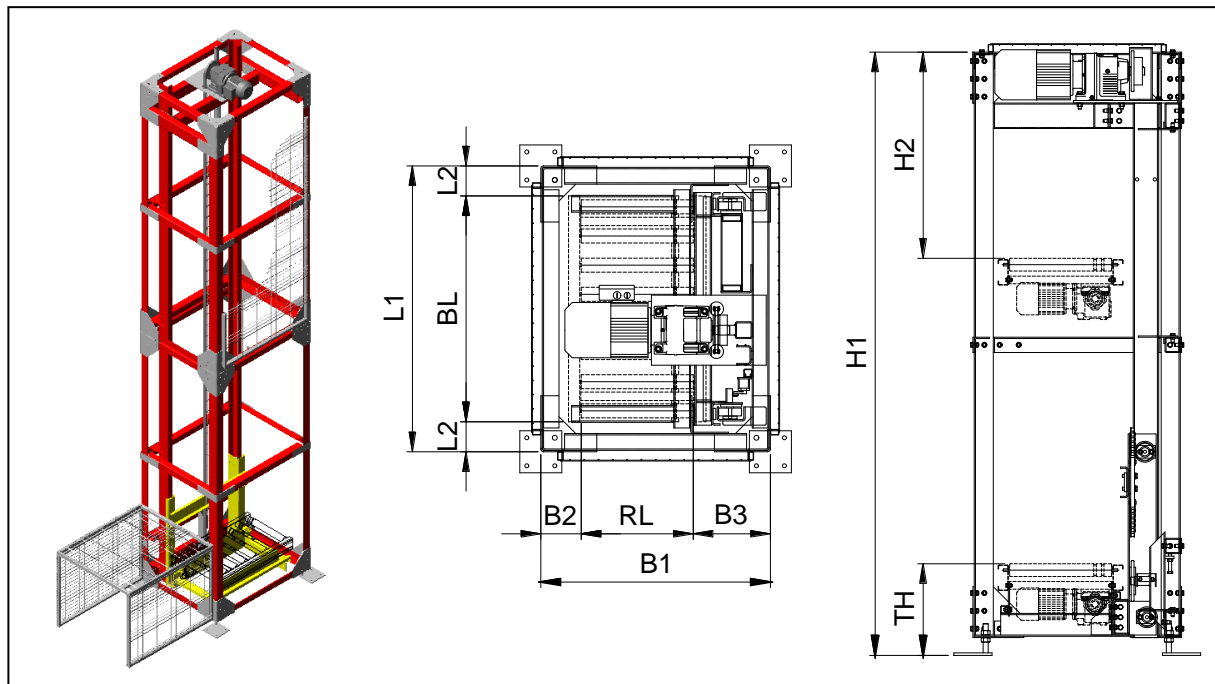

Area of usage:

Elevator for handling of goods between different levels.

Technical data:

Frame:	Angle bars.
Fencing:	Wire netting.
Lift motor:	Gearmotor with brake.
Brake voltage:	230 V _{AC} .
Lifting speed:	For frequency control 5 - 60 m/min.
Lifting movement:	With chain.
Goods weight:	Max 70 kg.

Surface treatment:

Frame:	RAL3020 (red) and zinc plated.
Movable parts:	RAL1006 (yellow).

Other:

As extra equipment there are cable tray, cable carrier and safety limit switches.
Other designs on request.

Height	TH	H2		H1
	min 400	min 800		max 6000 ¹⁾
Length	BL	L2		L1
	830 / 1040 ²⁾	120		L2+BL+L2
Width	RL	B2	B3	B1
	300-900	min 145	285	B2+RL+B3

1) Elevator with no support against a wall.

2) Total conveyor length.

Material Handling Modules AB

Österlervägen 280
S-270 21 Glemmingebro

Tel. + 46 411 55 89 80
Fax. + 46 411 52 27 70

info@mhmodules.com
www.mhmodules.com

VAT: SE556490745801