


KE 500 – Double angle conveyor, electric – Type DVE

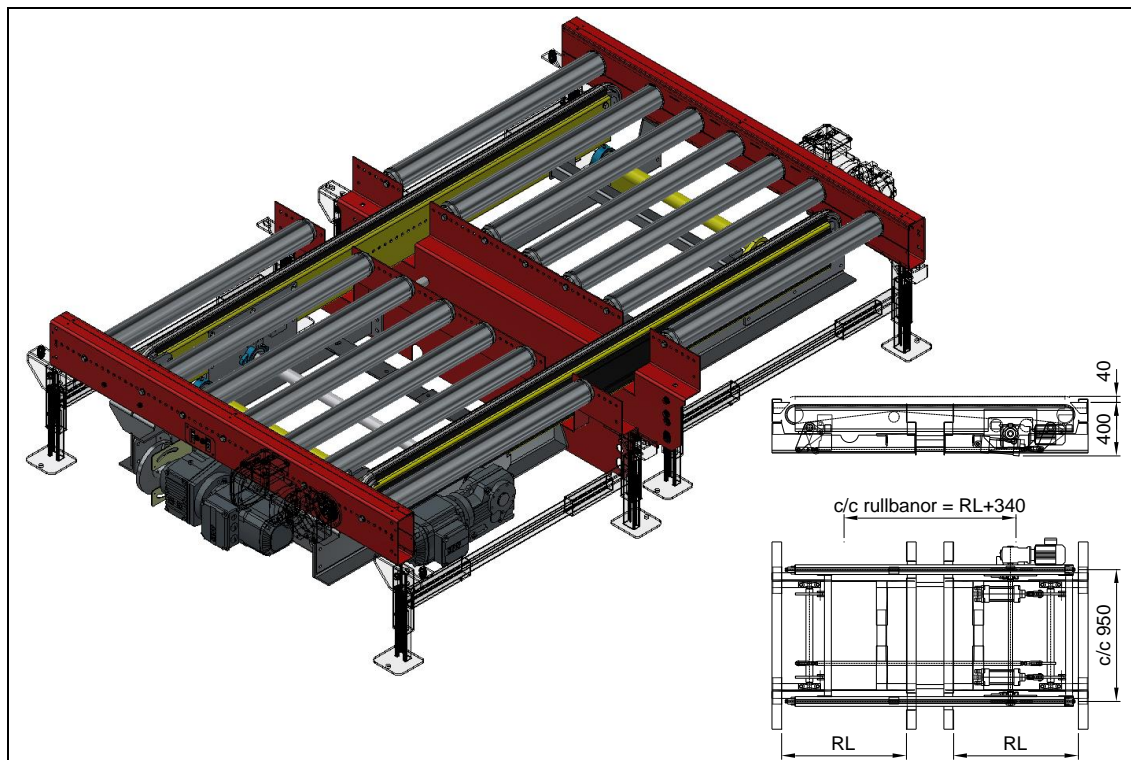

Area of application:

With the help of a chain-conveyor transport, move goods transversely between two runway lines.

Technical data:

Function:	Height-adjustable chain conveyor mounted in two parallel roller conveyors.
Lifting movement	Via two torque shafts, the movement of the rotating crankset is transferred to a raise and lower motion.
Lifting capacity:	500 kg.
Lifting frequency:	One complete cycle per minute.
Conveyor chain:	3/8" or 3/4" roller chain with straight side washers.
Drives:	For lifting movement: Foot-mounted straight gear motor For KT: Side-mounted angular gear motor For RB: See motor lists
Transport speeds:	6, 9 and 12.9 m/min (for transverse transport).
Available for roller length:	900 and 1100 mm.
Available for length (RB):	1330mm.