


KE 500 – Single angle conveyor, electric – Type EVE

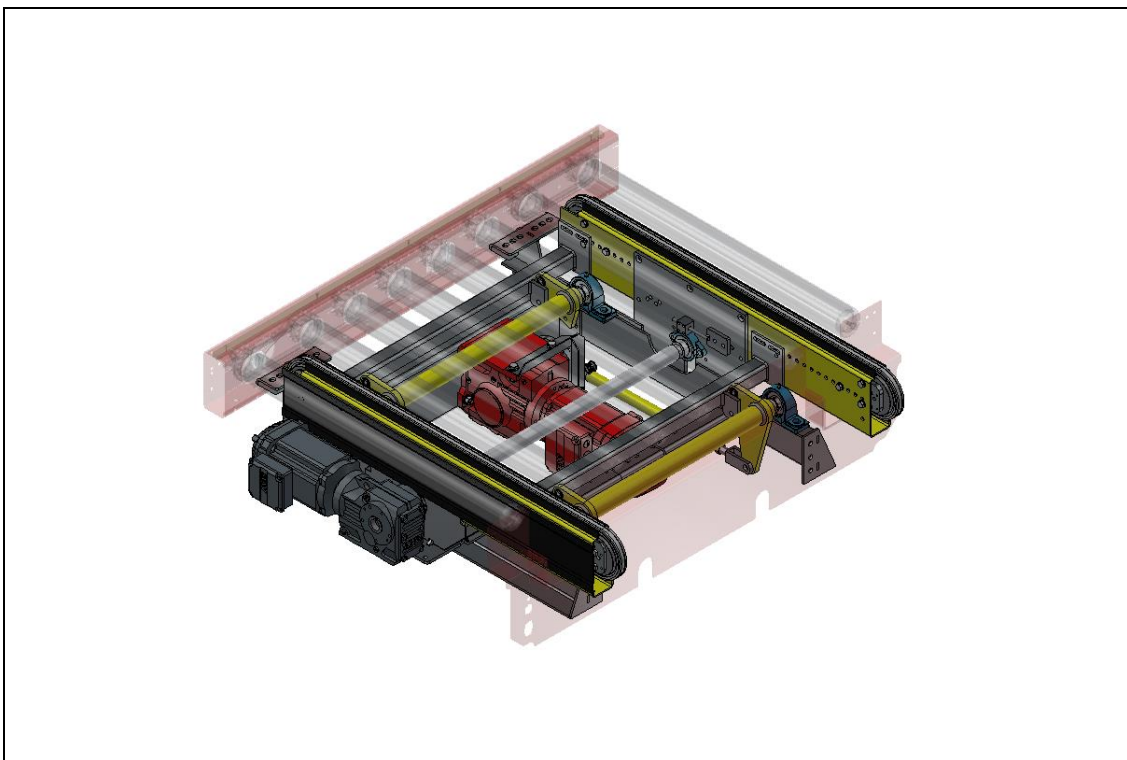

Area of application:

With the help of chain conveyor, switch over longitudinal transport. to transverse transportation.

Technical data:

Function:	Height-adjustable chain conveyor mounted in a roller conveyor.
Lifting movement	Via two torque shafts, the movement of the rotating crankset is transferred to a raise and lower motion.
Lifting capacity:	500 kg.
Lifting frequency:	One complete cycle per minute.
Conveyor chain:	3/8" or 3/4" roller chain with straight side washers.
Drives:	For lifting movement: Foot-mounted straight gear motor For KT: Side-mounted angular gear motor For RB: See engine lists
Transport speeds:	6, 9 and 12.9 m/min (for transverse transport).
Available for roller length:	900 and 1100 mm.
Available for length (RB):	1330 mm.